


7" TFT -LCD Monitor (Stand Type)

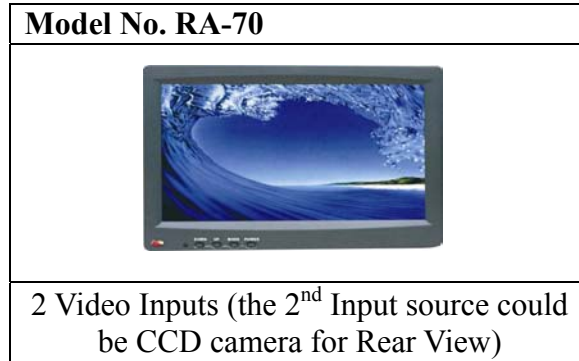

FEATURES:

- OSD (On Screen Display) control for: COLOR, TINT, and BRIGHTNESS, CONTRAST and MIRROR (L/R, U/D)
- Picture Mode select: 4:3 Full Mode
4:3 Wide Mode
4:3 Normal Mode
16:9 Cinema Mode
- Remote control / Press Button control
- Super Bright 16:9 Wide Screen TFT-LCD panel
- NTSC/PAL signal auto detection

SPECIFICATIONS:

Display:	7" active matrix TFT-LCD (16:9)
Back Light:	Built-in CCFL (x 2)
Dot Format:	1440 (H) x 234(V)
Number of Pixels:	336,960 Dot / 112,320 Pixels
Dot Pitch:	0.108mm(H) x 0.375mm(V)
Brightness:	300 cd/m ² (Nit)
Viewing angles:	65/65/40/65 degrees (L/R/T/B)
Pixel configuration:	Stripe
Power requirements:	12 V/ DC.
Video signal:	1V p-p (positive) 75 ohms.
Video system:	NTSC/PAL Auto Detection
Operating temperature:	32-122°F. or 0-50°C

PACKING: 1 SET/WHITE BOX, 6 SETS/CTN/6 KGS/7 KGS/1.2'



2F-6, No16. Sec 1, Chang-an E,Rd., Taipei City 10442, Taiwan.

Tel: (+886) 2 2523 1120 Fax: (+886) 2 2523 1223

E-mail: sales@rockvision.com.tw